


# WSL-T Series




*WSL-RGB Series  
Bring You Colorful World*



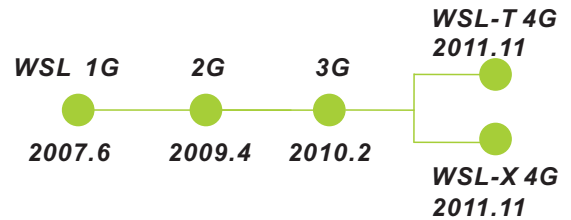



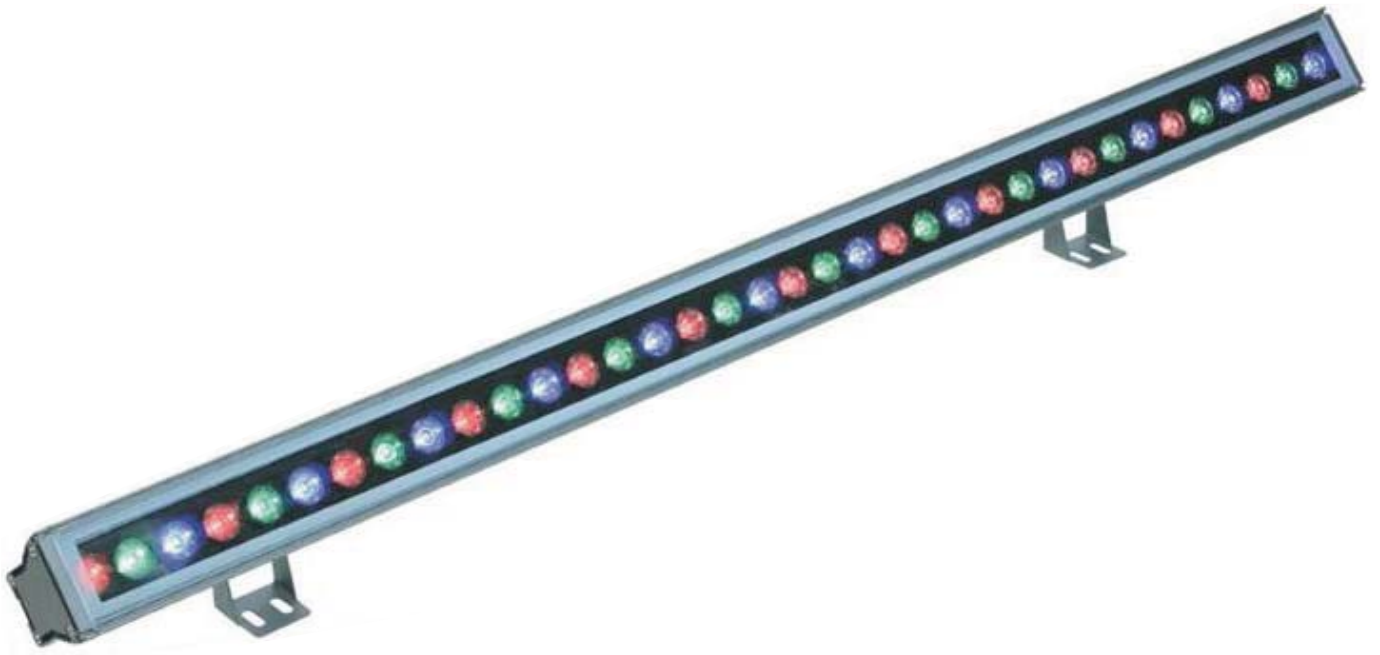






## ■ WSL-T Super Thin Wall Washer





























■ PHOTOS
















## Products Data


| Model Number  | Super Thin Edison 60cm 23W Linear Wall Washer Descriptions                                   |                    |   |   |  |  |              | Photo   |
|---------------|--|--------------------|---|---|--|--|--------------|---|
|               | Color  | Brightness (lumen) | LED Type  | IP  | Voltage  | Distance   | Size (LxWxH) |   |
| WSL-T-E18-RGB | RGB         | 954                | <br><b>EDISON</b><br>EDISON<br>Hi-Power<br>18x1W |  |  | <br>15-30M<br><br>LENS<br>Angle<br>A:25°<br>B:45°<br>C:60° | 46mm*615mm   |  |
| WSL-T-E18-R   | Red         | 960                |   |   |  |  |              |   |
| WSL-T-E18-G   | Green       | 1168               |   |   |  |  |              |   |
| WSL-T-E18-B   | Blue        | 377                |   |   |  |  |              |   |
| WSL-T-E18-Y   | Yellow      | 897                |   |   |  |  |              |   |
| WSL-T-E18-CW  | Cool White  | 1481               |   |   |  |  |              |   |
| WSL-T-E18-WW  | Warm White  | 1299               |   |   |  |  |              |   |

| Model Number  | Super Thin Edison 120cm 46W Linear Wall Washer Descriptions                                    |                    |  |  |   |   |              | Photo  |
|---------------|--|--------------------|--|--|---|---|--------------|--|
|               | Color  | Brightness (lumen) | LED Type   | IP   | Voltage   | Distance  | Size (LxWxH) |  |
| WSL-T-E36-RGB | RGB           | 1848               | <br><b>EDISON</b><br>EDISON<br>Hi-Power<br>36x1W |  |  | <br>15-30M<br><br>LENS<br>Angle<br>A:25°<br>B:45°<br>C:60° | 46mm*1200mm  |  |
| WSL-T-E36-R   | Red           | 1867               |  |  |   |   |              |  |
| WSL-T-E36-G   | Green         | 2284               |  |  |   |   |              |  |
| WSL-T-E36-B   | Blue          | 723                |  |  |   |   |              |  |
| WSL-T-E36-Y   | Yellow       | 1934               |  |  |   |   |              |  |
| WSL-T-E36-CW  | Cool White  | 3024               |  |  |   |   |              |  |
| WSL-T-E36-WW  | Warm White  | 2462               |  |  |   |   |              |  |


| Model Number  | Super Thin Bridgelux 60cm 23W Linear Wall Washer Descriptions                                  |                    |   |   |  |  |              | Photo   |
|---------------|--|--------------------|---|---|--|--|--------------|---|
|               | Color  | Brightness (lumen) | LED Type  | IP  | Voltage  | Distance   | Size (LxWxH) |   |
| WSL-T-B18-RGB | RGB         | 1016               | <br><b>BRIDGELUX</b><br>THE BEST OF BOTH<br>Bridgelux<br>Hi-Power<br>18x1W |  |  | <br>15-30M<br><br>LENS<br>Angle<br>A:25°<br>B:45°<br>C:60° | 46mm*615mm   |  |
| WSL-T-B18-R   | Red         | 1002               |   |   |  |  |              |   |
| WSL-T-B18-G   | Green       | 1288               |   |   |  |  |              |   |
| WSL-T-B18-B   | Blue        | 396                |   |   |  |  |              |   |
| WSL-T-B18-Y   | Yellow      | 1003               |   |   |  |  |              |   |
| WSL-T-B18-CW  | Cool White  | 1584               |   |   |  |  |              |   |
| WSL-T-B18-WW  | Warm White  | 1353               |   |   |  |  |              |   |

| Model Number  | Super Thin Bridgelux 120cm 46W Linear Wall Washer Descriptions                                 |                    |   |   |  |  |              | Photo   |
|---------------|--|--------------------|---|---|--|--|--------------|---|
|               | Color  | Brightness (lumen) | LED Type  | IP  | Voltage  | Distance   | Size (LxWxH) |   |
| WSL-T-B36-RGB | RGB         | 2032               | <br><b>BRIDGELUX</b><br>THE BEST OF BOTH<br>Bridgelux<br>Hi-Power<br>36x1W |  |  | <br>15-30M<br><br>LENS<br>Angle<br>A:25°<br>B:45°<br>C:60° | 46mm*1200mm  |  |
| WSL-T-B36-R   | Red         | 2003               |   |   |  |  |              |   |
| WSL-T-B36-G   | Green       | 2486               |   |   |  |  |              |   |
| WSL-T-B36-B   | Blue        | 781                |   |   |  |  |              |   |
| WSL-T-B36-Y   | Yellow      | 1992               |   |   |  |  |              |   |
| WSL-T-B36-CW  | Cool White  | 3091               |   |   |  |  |              |   |
| WSL-T-B36-WW  | Warm White  | 2592               |   |   |  |  |              |   |

■ DIMENSION

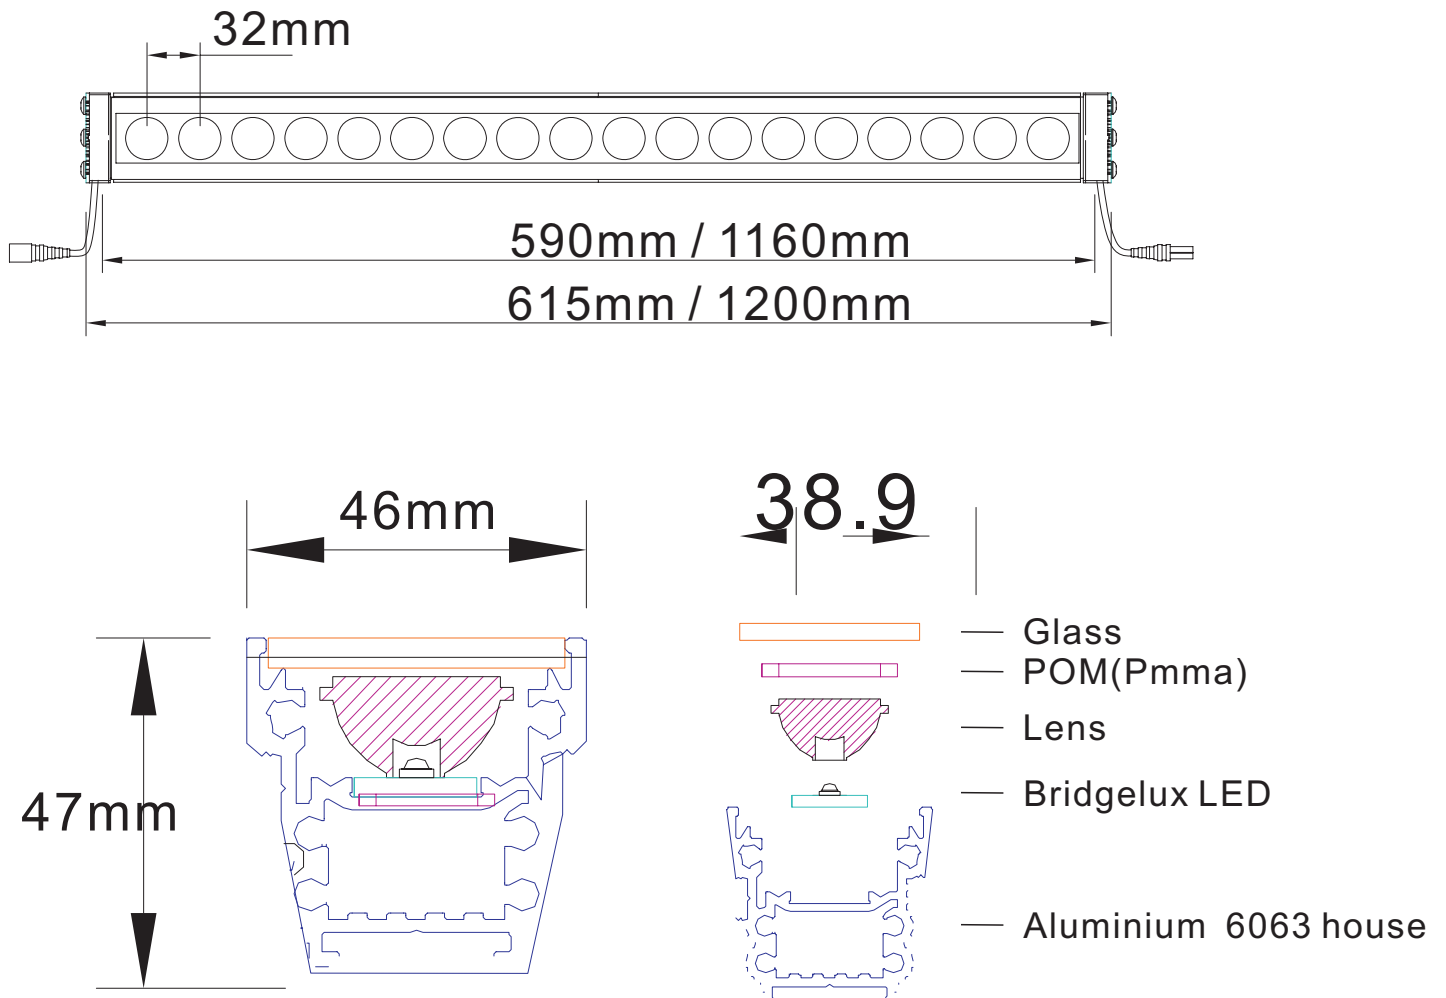

■ Single Color Wall Washer Connection

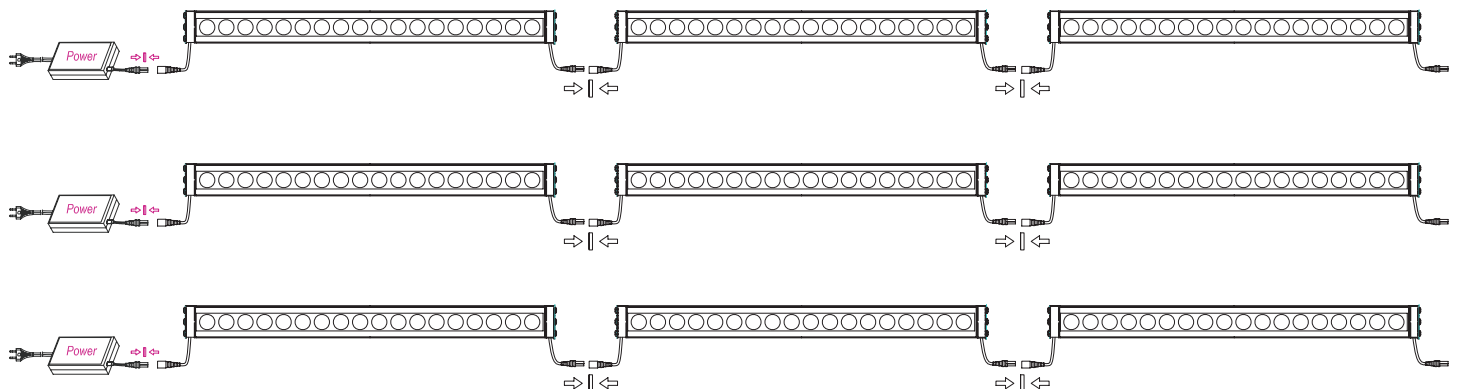

WPS-24V150W

One pcs WPS-24V150W can load 3 pcs 1.2m wall washers  
or 6 pcs 0.6m wall washers

## RGB Wall Washer Connection

### RGB Controller




CR-RFB62  
RGB controller

One piece of CR-RFB62 can load 3.6 meter RGB wall washer.




CR-RL  
RGBAP

One piece of CR-RL can load 3.6 meter RGB wall washer.

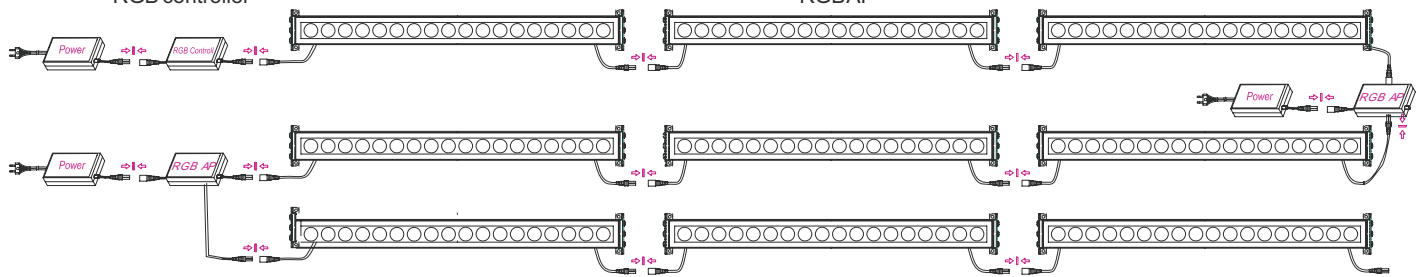

### DMX Controller



DMX512  
PC CONSOLE






DMX512 CONSOLE



CR-DMXCP


DMX data input

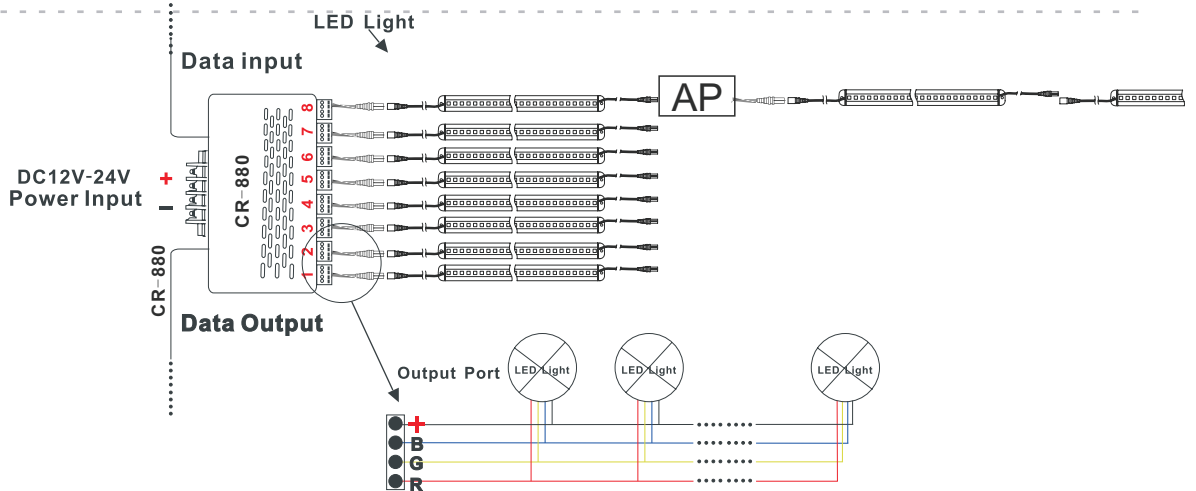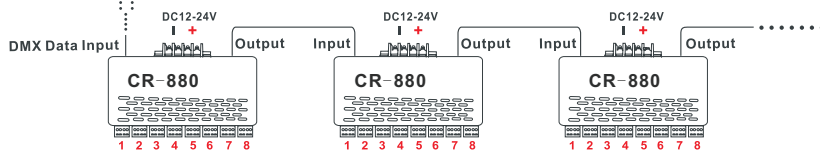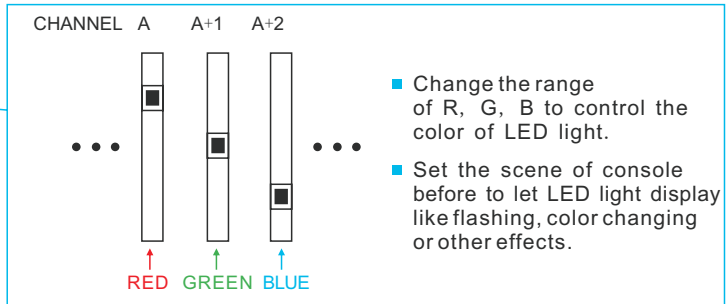

### 产品参数 Product Parameter CR-880

| 输入电源<br>Input Voltage | 最大负载电流<br>Max load Current | 输出最大功率<br>Max Output Power | 输出灰度级<br>Output Scale Level | 输入信号<br>Input Signal | 输出负载<br>Output DMX Channel |
|-----------------------|----------------------------|----------------------------|-----------------------------|----------------------|----------------------------|
| DC12V-DC24V           | 3A/CH×24                   | 860W/720W<br>(12V/24V)     | 256 levels                  | DMX512/1990          | 24CH                       |

## PACKING INFORMATION

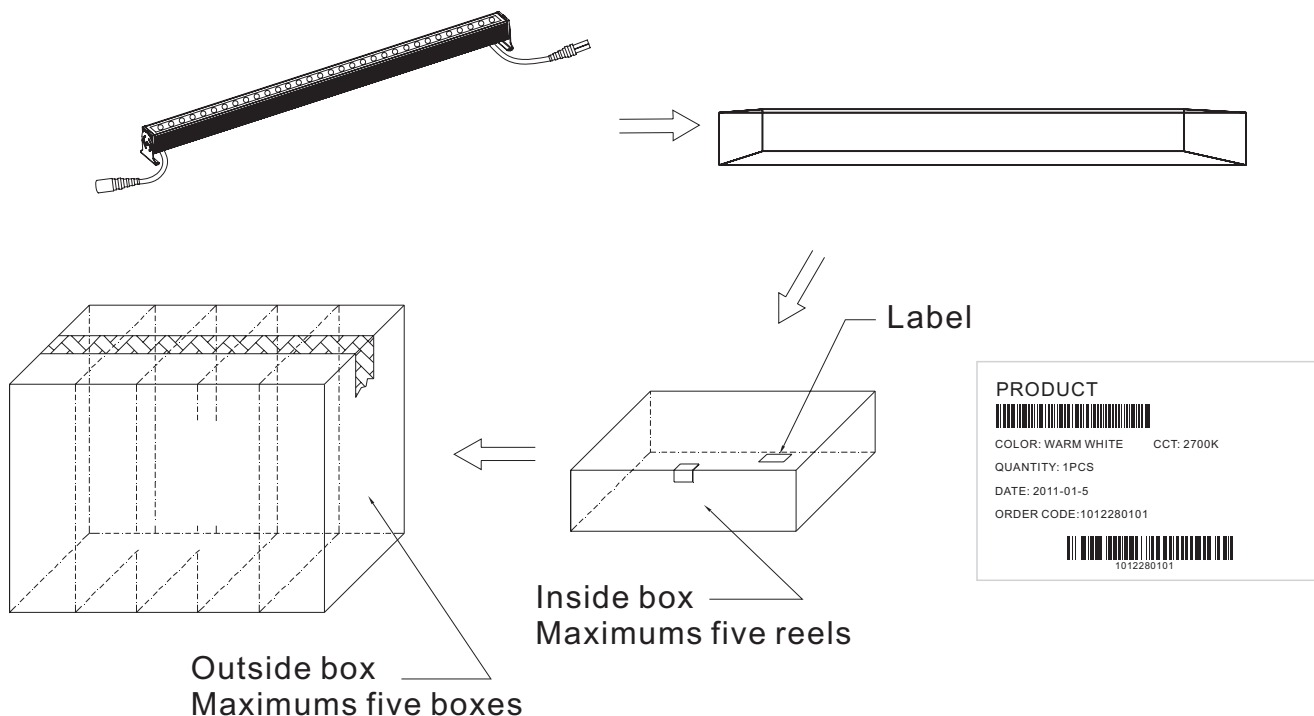

## STORAGE CONDITIONS

### Before opening the package:


The LEDs should be kept at 30 °C or less and 70%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

### After opening the package:

The LEDs should be kept at 30 °C or less and 50%RH or less. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It is also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

## SAFETY INFORMATION

- The par30 and its components can not be mechanically pressed.
- Correct electrical polarity needs to be observed.
- Ensure the power is adapt to operate the total load.
- Installation must not damage the conducting paths on the circuit board.
- Parallel connection is highly required as safe electrical operation mode.
- Pay attention to ESD precautions during assembling.
- Assembly of LED modules includes power supplier must be appropriately.
- When installing on metallic or other surface, an electrical isolation point between strip and the installing surface is recommended.
- Only qualified person allowed to operate installations.

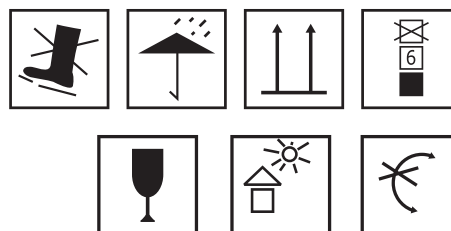

Damaged by corrosion will not be materials defect claim. It is the user's responsibility to provide a suitable protection against moisture, condensation and other harmful elements.